


# TITAN HOOKLOADER

Capacity 260 kN (-SK) H= 1420/1450 mm CH= 1050 mm

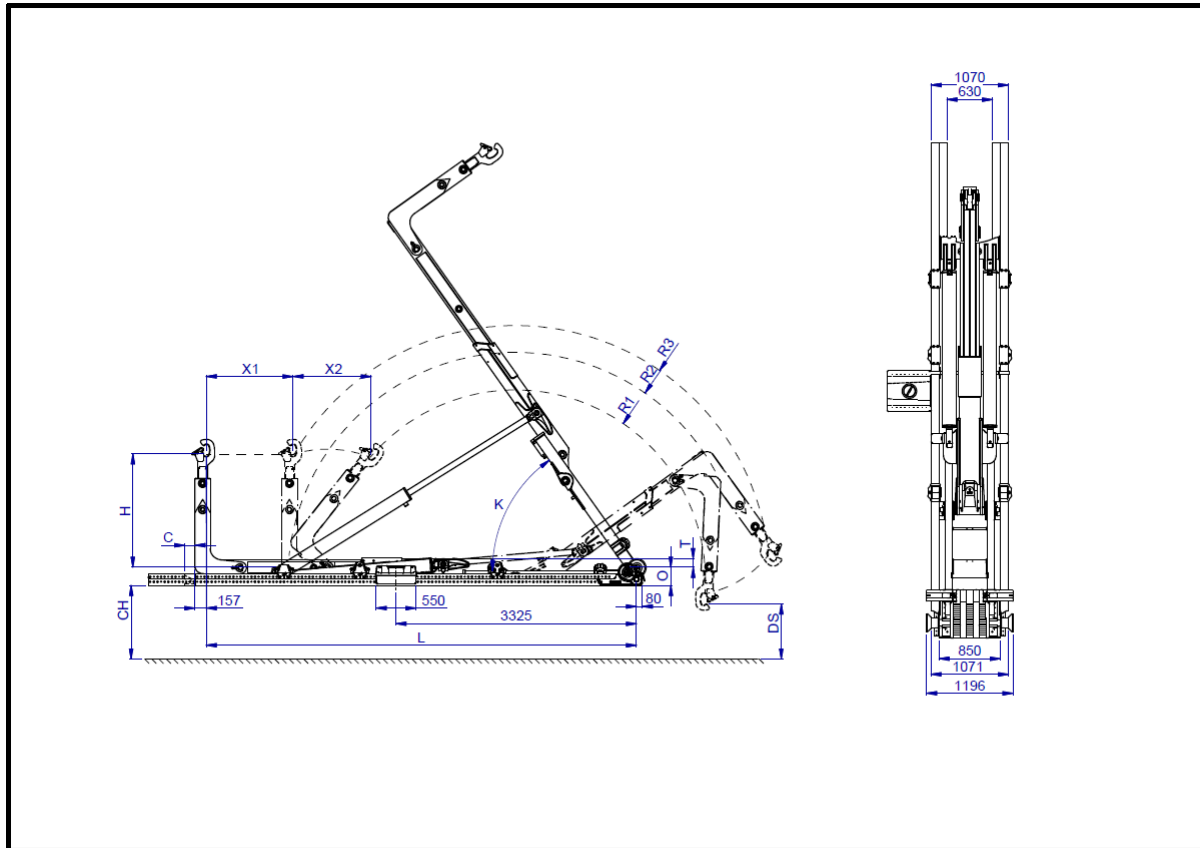

TYPE:	T26-49-SK	T26-51-SK	T26-53-SK	T26-55-SK	T26-57-SK	T26-60-SK	T26-62-SK	T26-65-SK	T26-67-SK
X1 (mm)	700	800	1000	900	1000	1200	1200	1400	1400
X2 (mm)	+1150	+1150	+1150	+1150	+1150	+1150	+1150	+1150	+1150
L (mm)	4900	5100	5300	5500	5700	5950	6200	6450	6650
O (mm)	250	250	250	280	280	280	280	280	280
K	53°	53°	53°	54°	54°	54°	54°	51°	51°
R1 (mm)	2355	2425	2425	2510	2585	2625	2820	2700	2860
R2 (mm)	2905	3005	3005	3110	3210	3260	3505	3355	3555
R3 (mm)	3205	3290	3290	3395	3480	3525	3745	3610	3785
T (mm)	130	130	130	130	130	130	130	130	130
Weight <sup>1</sup> (kg)	2575	2625	2675	3050	3100	3150	3200	3250	3325
DS (mm)	960	1025	1025	925	985	1015	1170	1080	1200
Min./max. container length (mm)	3050-6000	3150-6200	3150-6400	3450-6600	3550-6800	3600-7050	3850-7300	3900-7550	4100-7750
C (mm)	200	200	200	200	200	200	200	120	120
Loading (time) <sup>2</sup> (s)	30	30	31	35	36	37	37	38	43
Unloading (time) <sup>2</sup> (s)	38	38	39	45	45	46	46	46	51
Tipping (time) <sup>2</sup> (s)	33	33	33	39	39	39	39	39	44
Fast unloading (time) <sup>2</sup> (s)	12	12	12	14	14	14	14	14	16
Supplied Pump (l/min)	108	108	108	108	108	108	108	108	108
Flow (l/min)	120	120	120	120	120	120	120	120	120

H = Hook height, CH = Chassis height, DS = Lowest pick up point (depending on hook- and chassis height)

<sup>1</sup> Rough estimation based on a standard system, filled with oil and without mounting kit accessories.

<sup>2</sup> Rough estimation based on PTO type C, pump 120 l/min., motor 1200rpm, PTO transmission i = 1.0 and dependent on cylinder thickness.

Pressure: 350 bar

Version 11, valid from May, 2016