


TITAN HOOKLOADER

Capacity 300 kN (-SK) H= 1420/1450 mm CH= 1050 mm

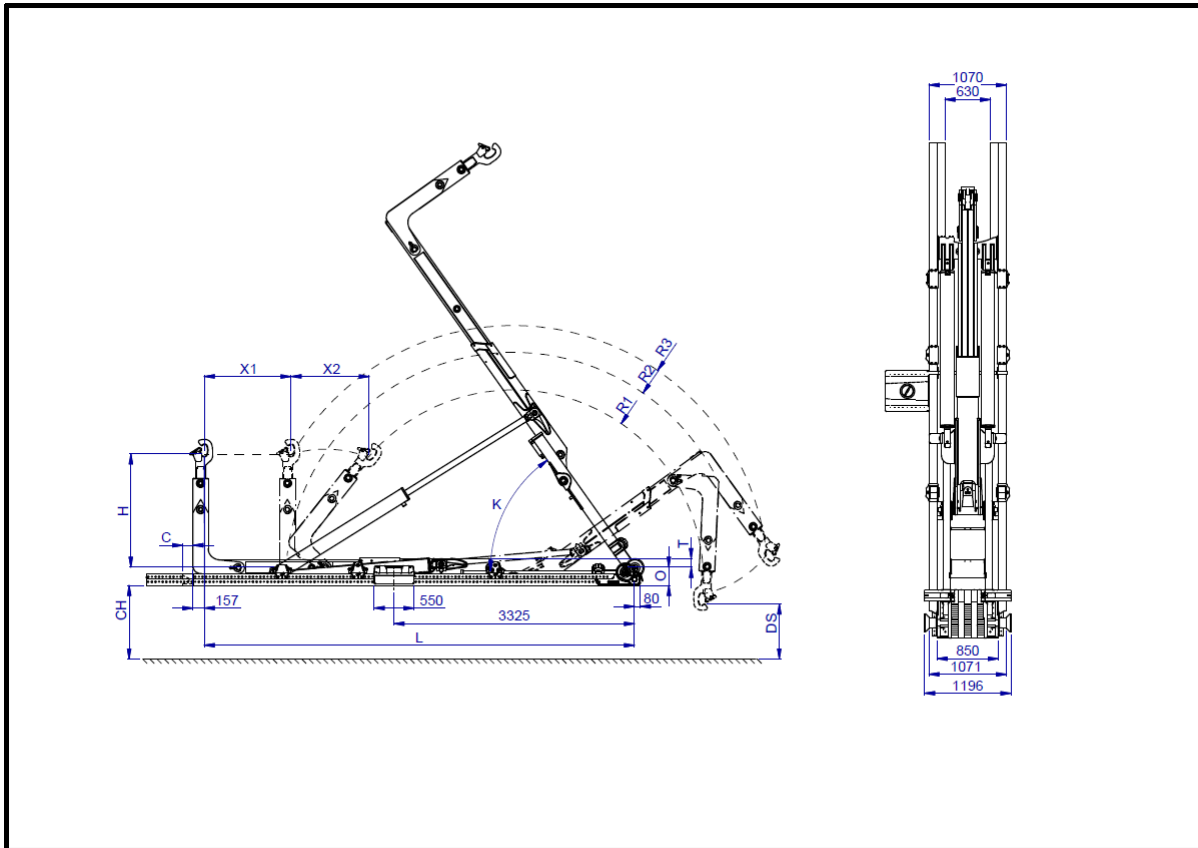

TYPE:	T30-55-SK	T30-57-SK	T30-60-SK	T30-62-SK	T30-65-SK	T30-67-SK
X1 (mm)	900	1000	1200	1200	1400	1400
X2 (mm)	+1150	+1150	+1150	+1150	+1150	+1150
L (mm)	5500	5700	5950	6200	6450	6650
O (mm)	280	280	280	280	280	280
K	54°	54°	54°	54°	51°	51°
R1 (mm)	2510	2585	2625	2820	2700	2860
R2 (mm)	3110	3210	3260	3505	3355	3555
R3 (mm)	3395	3480	3525	3745	3610	3785
T (mm)	130	130	130	130	130	130
Weight ¹ (kg)	3075	3125	3175	3225	3275	3325
DS (mm)	925	985	1015	1170	1080	1200
Min./max. container length (mm)	3450-6600	3550-6800	3600-7050	3850-7300	3900-7550	4100-7750
C (mm)	200	200	200	200	120	120
Loading (time) ² (s)	40	41	42	42	43	43
Unloading (time) ² (s)	50	50	51	51	51	51
Tipping (time) ² (s)	44	44	44	44	44	44
Fast unloading (time) ² (s)	15	15	16	16	16	16
Supplied Pump (l/min)	108	108	108	108	108	108
Flow (l/min)	120	120	120	120	120	120

H = Hook height, CH = Chassis height, DS = Lowest pick up point (depending on hook- and chassis height)

¹ Rough estimation based on a standard system, filled with oil and without mounting kit accessories.

² Rough estimation based on PTO type C, pump 108 l/min., motor 1200rpm, PTO transmission i = 1.0 and dependent on cylinder thickness.

Pressure: 350 bar

Version 11, valid from May, 2016